



SIP SCREWS

Wood Screw

R-Control® Wood Screws are used to attach R-Control SIPs (Structural Insulated Panels) and Foam-Control Nailbase to wood structural members and substrates. The R-Control Wood Screw is strong and costs less than other systems using screws and stress plates or spikes.

- Significant savings over “screw and plate” systems
- Stronger than spikes or nails
- One step for easy installation
- 6 lobe drive head for less stripping
- Sits tight to the R-Control SIP or Foam-Control Nailbase surface
- Available in lengths from 3” - 18”

Metal Fasteners

R-Control Metal Fasteners are used to attach R-Control SIPs and Foam-Control Nailbase to metal structural members and substrates. R-Control Heavy Duty Metal Fasteners can self drill into $\frac{3}{16}$ ” steel without pilot hole predrilling. Installation is direct and fast - no wood nailers needed.

- Self drilling into steel
- No wood nailers needed
- One step for fast installation
- 6 lobe drive head for less stripping
- Sits tight to the R-Control SIP or Foam Control Nailbase surface
- Superior wind up lift strength
- Available in lengths from 6” - 13 $\frac{3}{4}$ ”

SIP ACCESSORY




CONTROL, NOT COMPROMISE.

R-Control SIP Screws and Fasteners are engineered and manufactured to give you control over every aspect of your project installation.


- Easy to install
- Self drilling
- Color and large head size makes it easy to see for job verification
- Heat treated steel for high strength and durability
- Coated for superior corrosion resistance

Wood Screw

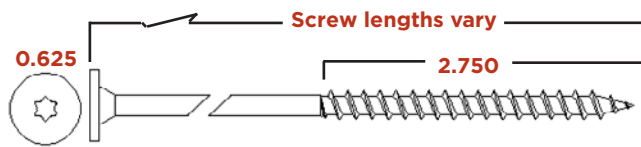

Head Style	Pancake head with internal 6 lobe drive
Head Diameter	0.625"
Drive Style	T-30, 6 lobe
Thread Diameter	0.255"
Shank Diameter	0.190"
Point Style	Thread Point


Metal Fasteners - Heavy Duty

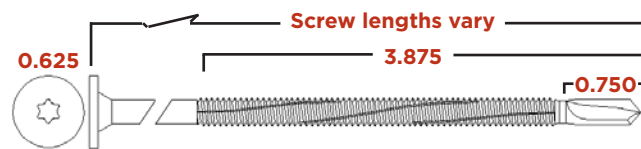

Head Style	Pancake head with internal 6 lobe drive
Head Diameter	0.625"
Drive Style	T-30, 6 lobe
Thread Diameter	0.245"
Shank Diameter	0.212"
Point Style	Drill Point

Metal Fastener - Light Duty

Your R-Control SIP supplier also provides a light duty metal fastener. R-Control Light Duty Metal Fasteners are used to attach R-Control SIPs and Foam-Control Nailbase to light duty (up to 18 gauge) metal substrates.



Specifications/Installation

Wood Screws and/or Metal Fasteners as shown on plans and in specifications shall be supplied by the R-Control supplier.

Use R-Control SIP Wood Screws and/or Metal Fasteners per R-Control SIP recommended installation guidelines. Refer to R-Control SIP Load Design Charts, Construction Manual and Technical Bulletins showing proper design and applications.

R-Control SIP Accessory Availability

Your nearest R-Control supplier will be happy to collaborate with you to determine your needs for R-Control SIP Accessories as part of your complete R-Control SIP package. For additional information on R-Control SIPs and to contact your nearest supplier visit our website at www.r-control.com.



BIG SKY INSULATIONS, INC
15 Arden Drive | P.O. Box 838
Belgrade, MT 59714

(406) 388-4146 | (800) 766-3626 | Fax (406) 388-7223

Email: answers@bigskyrcontrol.com

Website: www.BigSkyRControl.com



R-Control SIPs are made exclusively with Foam-Control EPS with Perform Guard and are manufactured by AFM Corporation licensees.

Copyright ©2008 AFM Corporation. All rights reserved. Printed in USA. R-Control, Foam-Control, and Perform Guard are registered trademarks of AFM Corporation, Burnsville, MN.

RC08-03/08



R-Control SIPs
www.r-control.com

**CONTROL,
NOT COMPROMISE.**